


CAPACITY	TYPE	MODEL	INSTALLATION
1.000L	UNVENTED	INDIRECT	FLOOR STANDING

constructive specifications

capacity	1.000L
tank material	stainless steel AISI 316L
thermal insulation	100mm thermal insulation made from flexible polyurethane
casing	"Skay" (PVC) outer casing with zip closing
coil material	stainless steel tube AISI 316L
primary coil surface area	2,86m²
primary coil rating	50,0kW (@ 30L/min)
continuous output	829 litres/hour
heat up time from cold	57min (@ 30L/min)
re-heat time	40min
primary coil resistance	225mBar
primary flow rate (boiler)	30 litres/min
maximum working temperature	90°C
heating elements	2no. 3kW x 240V titanium immersion (1½" F connection)
t&p temperature / pressure setting	95°C / 7bar (¾" 7BAR 90-95°C 25kW - 309575 - CALEFFI)
expansion relief setting	6bar
max. secondary working pressure	3bar
max. primary working pressure	6bar
expansion vessel	100
inspection hatch - OPTIONAL	internal diameter of 117mm ; external diameter of 180mm
unvented kit components	complete with: expansion vessel + pressure reducing valve + pressure relief valve + temperature and pressure relief valve + tundish + zone valve
weight (dry / full)	230kg / 1309kg
heat loss	124W
manufacture art. code no.	
purchasing art. code no.	

connections and dimensions

connections

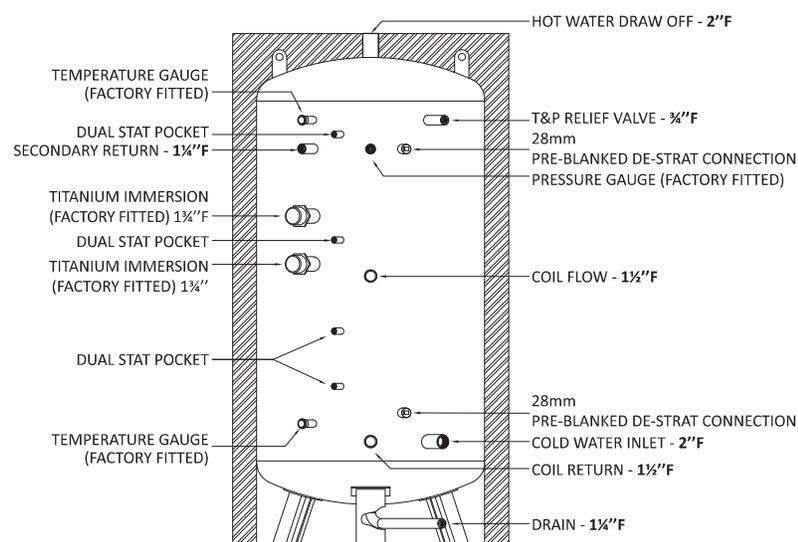

dimensions

