

CAPACITY	TYPE	MODEL	INSTALLATION
800L	UNVENTED	MULTI ENERGY	FLOOR STANDING


version.1

constructive specifications

capacity	800L
tank material	stainless steel AISI 316L
thermal insulation	100mm thermal insulation made from flexible polyurethane
casing	"Skay" (PVC) outer casing with zip closing
max. secondary working pressure	3bar
maximum working temperature	90°C
heating elements	3no. 6kW 1PH titanium immersion
t&p temperature / pressure setting	95°C / 7bar (¾" 7BAR 90-95°C 25kW - 309575 - CALEFFI)
expansion relief setting	6bar
continuous output	281 litres/hour
heat up time from cold	229min
re-heat time	160min
expansion vessel	80 litres
inspection flange - OPTIONAL	internal diameter of 117mm ; external diameter of 180mm
unvented kit components	complete with: expansion vessel + pressure reducing valve + pressure relief valve + temperature and pressure relief valve + tundish + zone valve
weight (dry / full)	150kg / 910kg
heat loss	121W
manufacture art. code no.	
purchasing art. code no.	

connections and dimensions

connections

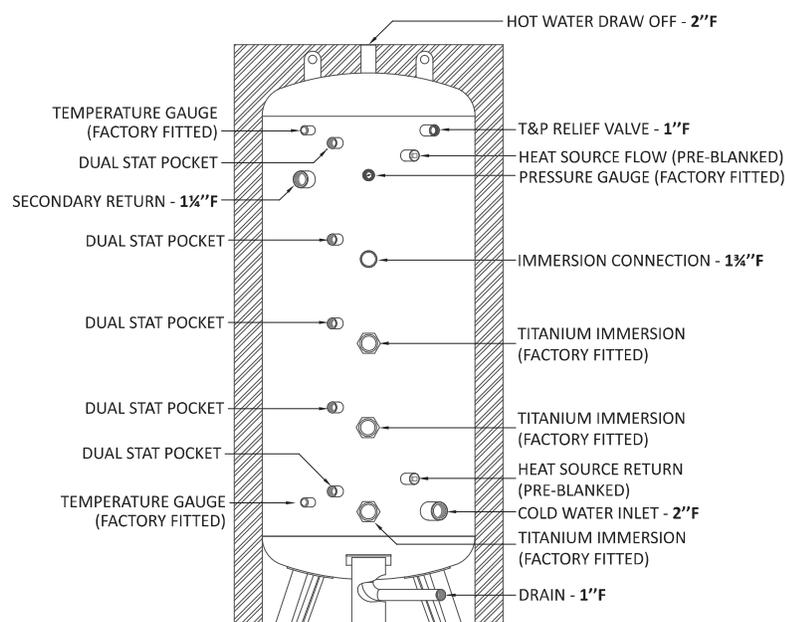

dimensions

